



US005516249A

United States Patent [19]
Brimhall

[11] **Patent Number:** **5,516,249**
[45] **Date of Patent:** **May 14, 1996**

[54] **EXOSKELETON WITH KINESTHETIC FEEDBACK AND ROBOTIC CONTROL**

[75] Inventor: **Owen D. Brimhall**, South Jordan, Utah

[73] Assignee: **Technical Research Associates, Inc.**, Salt Lake City, Utah

[21] Appl. No.: **241,157**

[22] Filed: **May 10, 1994**

[51] **Int. Cl.⁶** **B25J 3/04**

[52] **U.S. Cl.** **414/5; 364/806**

[58] **Field of Search** **414/5; 364/806**

[56] **References Cited**

U.S. PATENT DOCUMENTS


3,263,824	8/1966	Jones et al.	414/5
4,302,138	11/1981	Zarudiansky	414/5
5,143,505	9/1992	Burdea et al.	414/5
5,184,319	2/1993	Kramer	901/34 X

Primary Examiner—Donald W. Underwood
Attorney, Agent, or Firm—J. Winslow Young

[57] **ABSTRACT**

A control apparatus and method for controlling a remote actuator, the control apparatus having a kinesthetic feedback system for providing a kinesthetic sensation to the operator as a physical sensation representative of the resistive forces encountered by the remote actuator. The control apparatus is configured to be releasably mounted to the hand of the operator with control modules supported at preselected joints of the hand. The control modules sense changes in the angular orientation in the respective joints and generate a control signal as a function of the change. This control signal is used to drive the corresponding actuator. Each actuator includes a sensor to sense resistive forces encountered by the actuator and generate a response signal as a function of the resistive forces. A magnetostrictive clutch mechanism on the control module is controlled by the response signal to provide a resistive force against movement of the control module thereby providing a kinesthetic sensation to the hand of the operator.

10 Claims, 4 Drawing Sheets

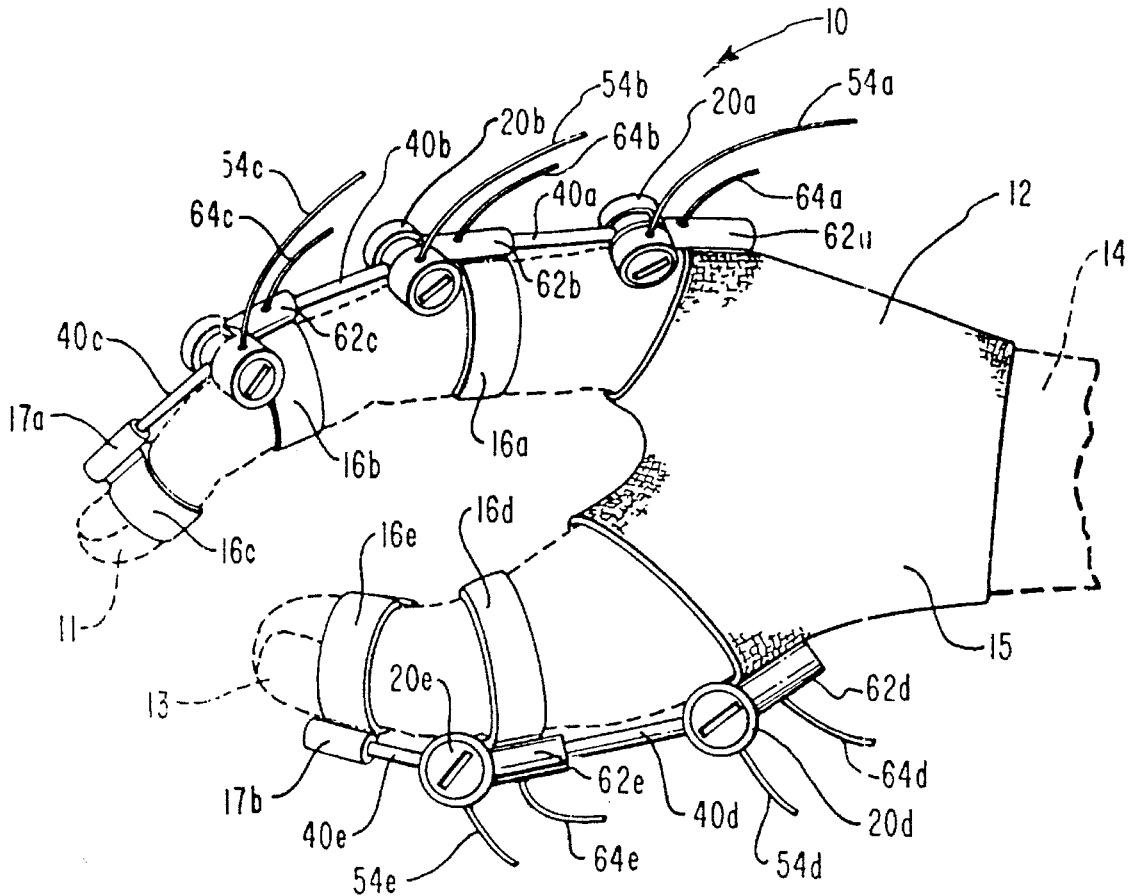

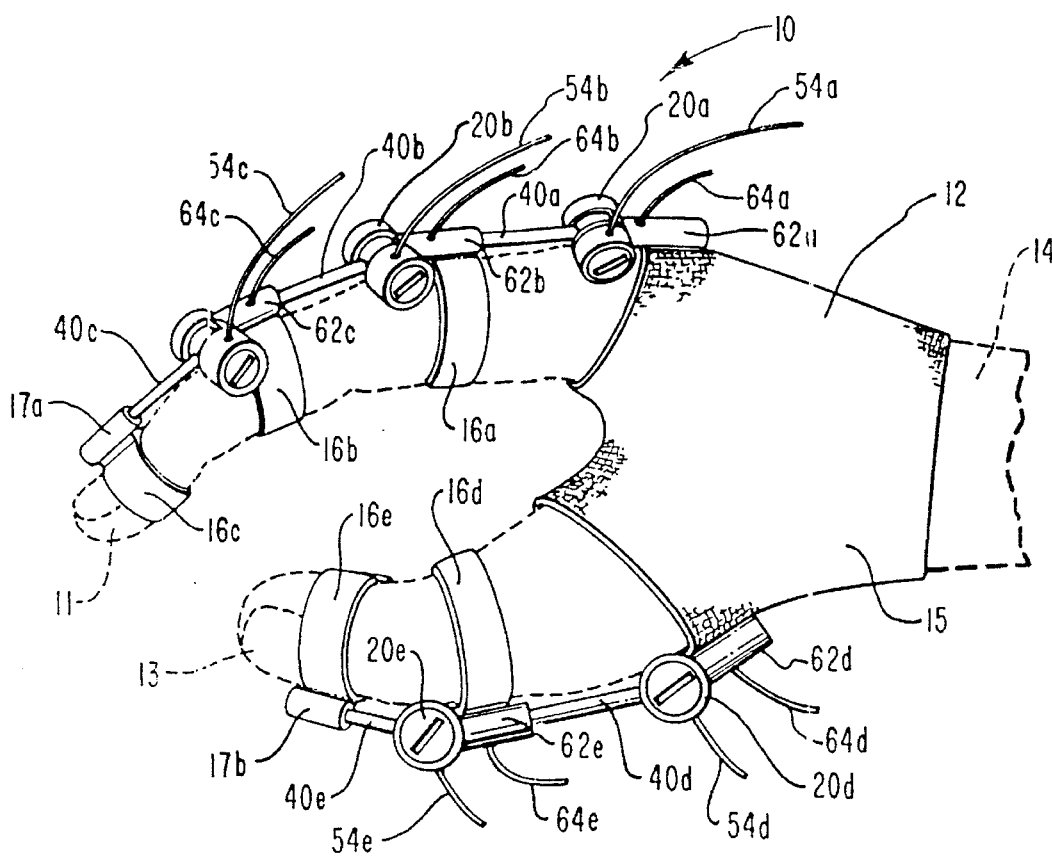


FIG. 1

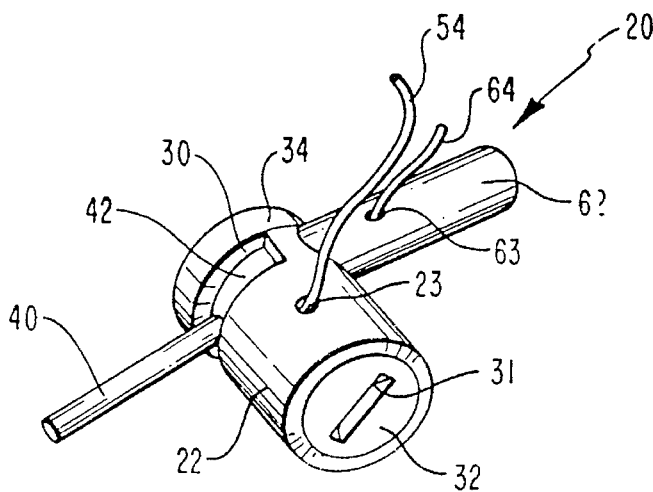
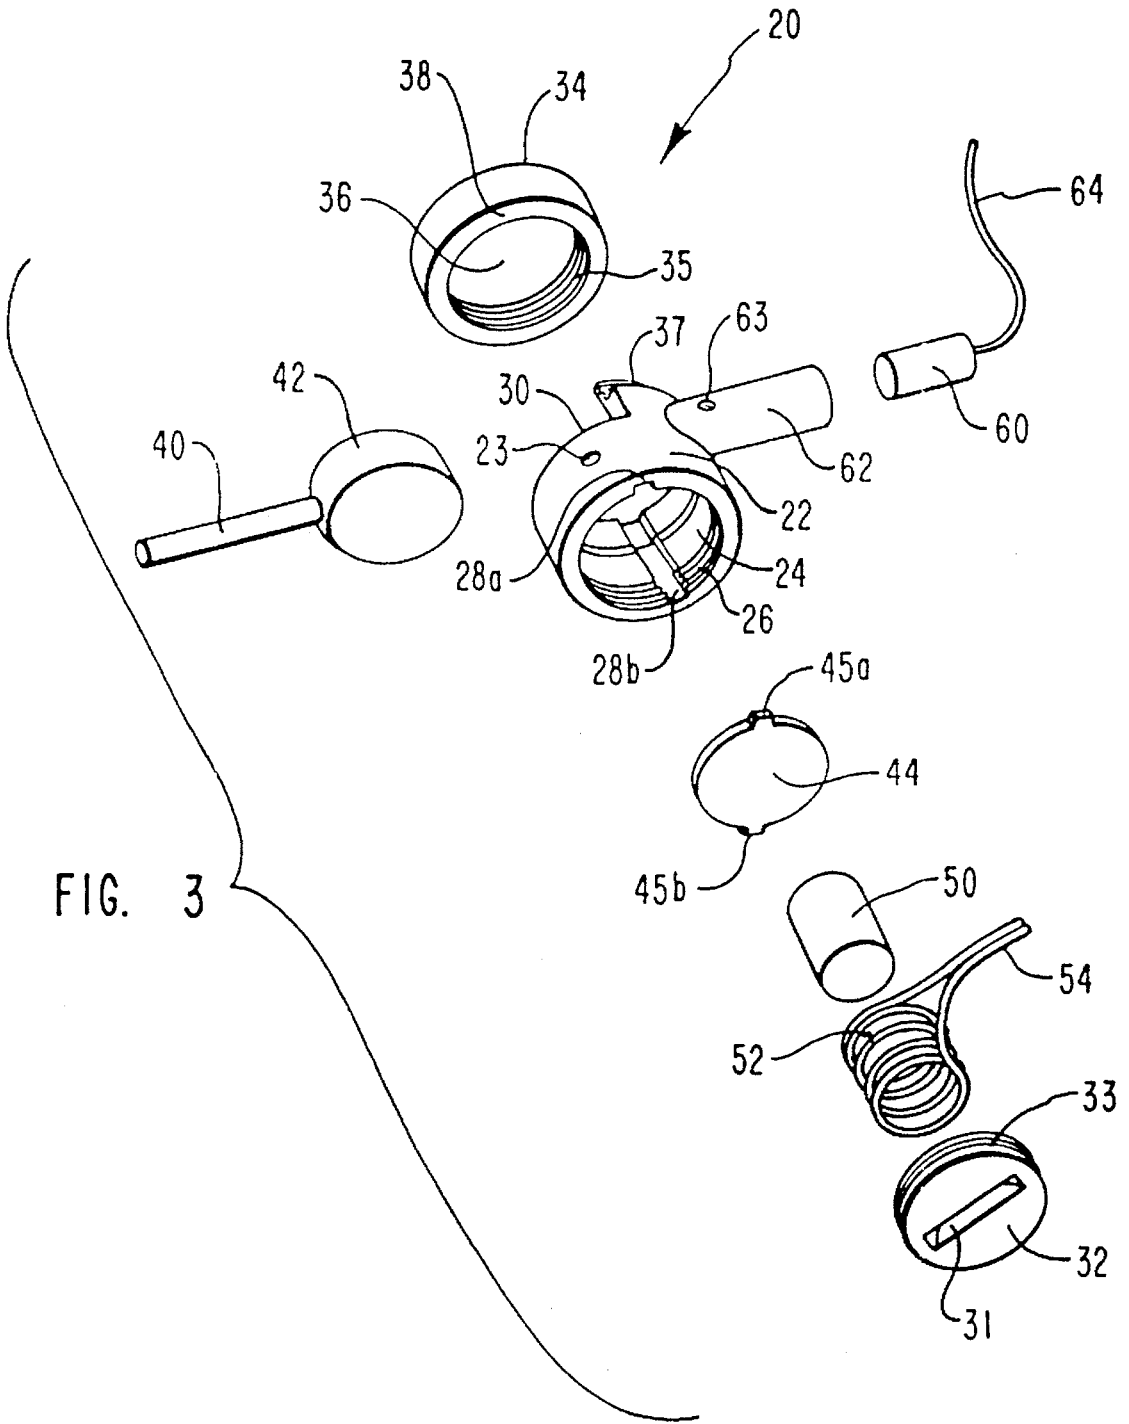


FIG. 2



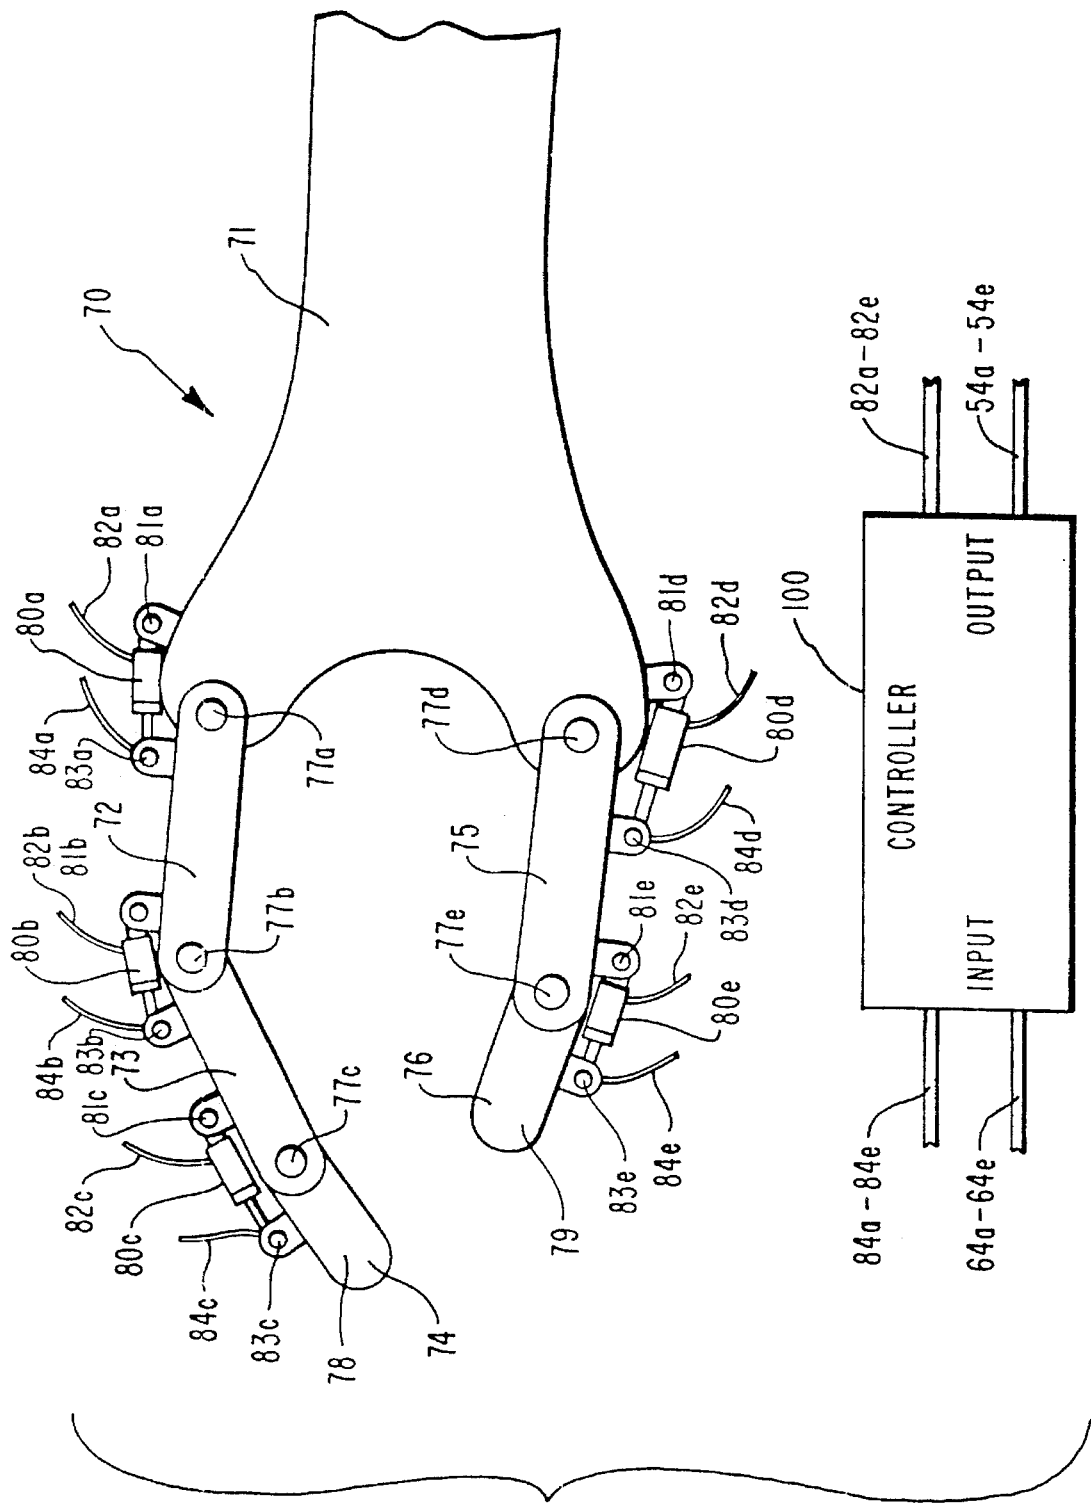


FIG. 4

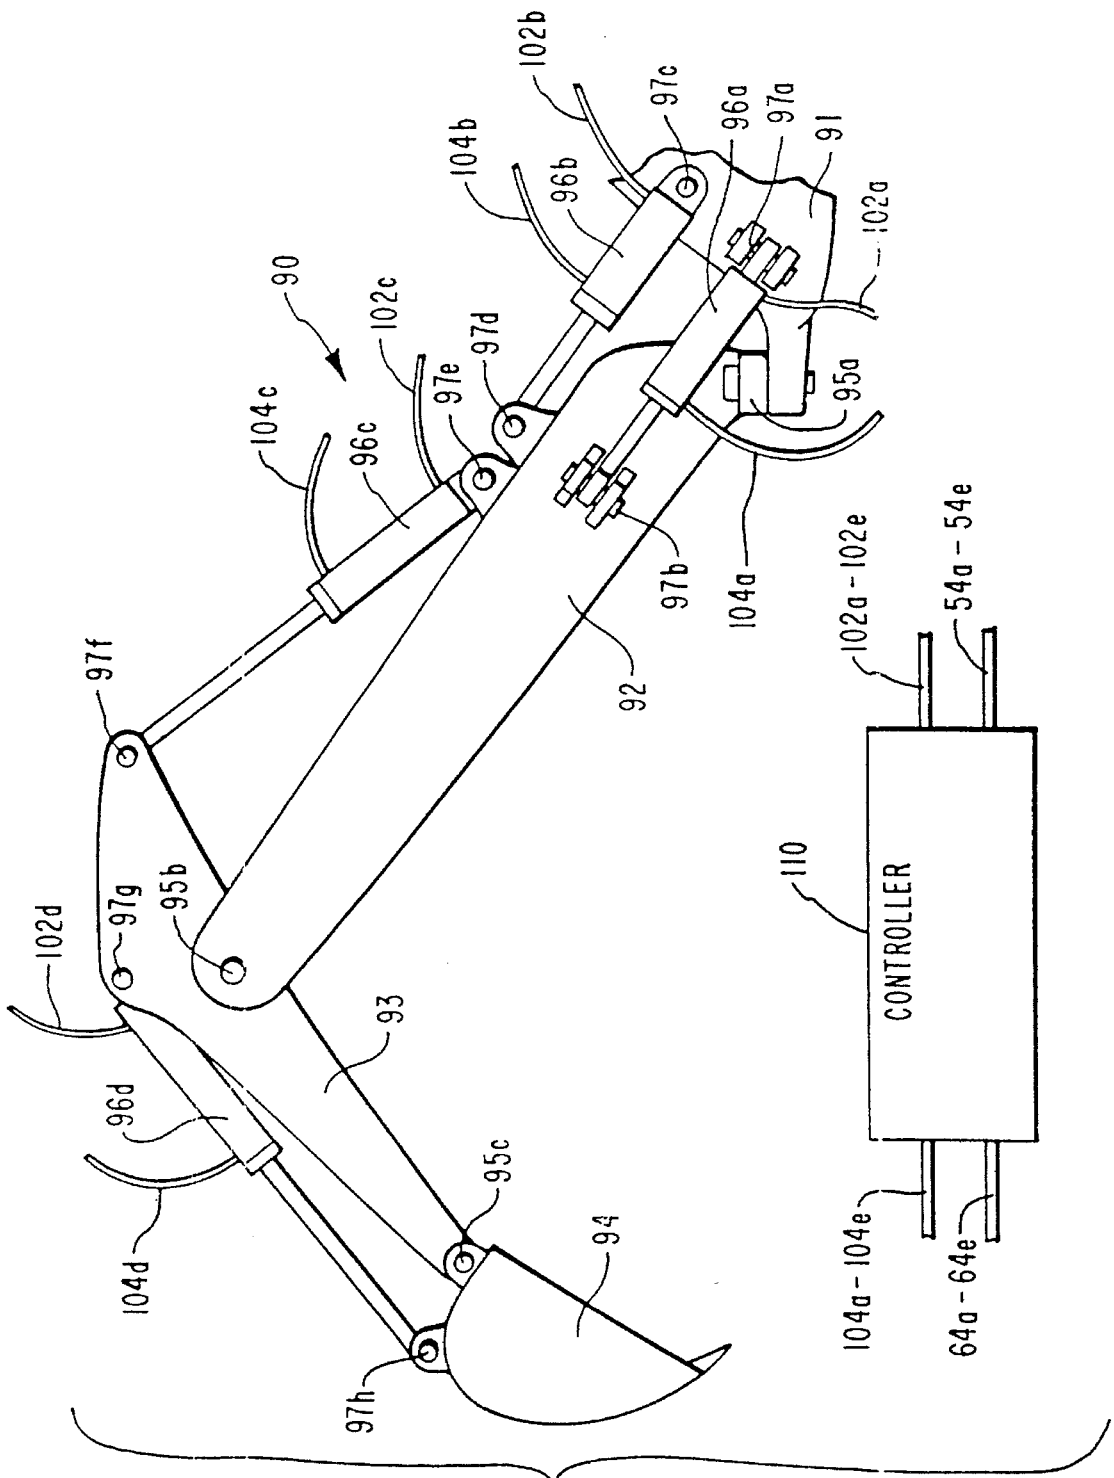


FIG. 5

EXOSKELETON WITH KINESTHETIC FEEDBACK AND ROBOTIC CONTROL

BACKGROUND

1. Field of the Invention

This invention relates to exoskeletal apparatus for robotic control and, more particularly to a novel exoskeleton apparatus and method with kinesthetic feedback for robotic control.

2. The Prior Art

Robotic devices are designed to perform certain functions at remote locations under the command of either a person or a computer located at a separate location. Ideally, a human-operated robotic device will not only accurately follow the commands of the human operator but will also feed back to the human a replica of the forces encountered by the robotic device as though the human were performing the tasks of the robotic device. This feedback is known as kinesthetic feedback and is essential for the accurate manipulation of a robotic device. The importance of kinesthetic feedback can be illustrated by the simple experiment of lacing one's shoes while wearing thick gloves. The task becomes virtually impossible if one is also wearing a blindfold. Removal of the gloves provides the person with all of the tactile sensations of the hands so that it is a relatively simple task to lace or tie the shoes even while continuing to wear the blindfold.

This simple experiment readily demonstrates the value of kinesthetic feedback. Research has shown that task speed and other performance measures are increased significantly when kinesthetic feedback is added to visual feedback in the operation of a robotic device. However, the problem is one of providing the operator with a kinesthetic feedback system that is readily adaptable into an exoskeletal control system for robotic manipulation.

In view of the forgoing it would be an advancement in the art to provide a novel exoskeleton for robotic control having kinesthetic feedback to provide the operator with a realistic tactile sensation of the forces encountered by the robotic device controlled by the exoskeleton. Another advancement in the art would be to provide a dexterous, intuitive feedback system to enable the operator to experience the forces encountered by the robot whether these forces are amplified in the case of microscopic robots or attenuated in the case of large robots. Such a novel apparatus and method is disclosed and claimed herein.

BRIEF SUMMARY AND OBJECTS OF THE INVENTION

The present invention involves an exoskeletal control system mounted to a framework into which a hand may be inserted to manipulate the exoskeletal control system. Each joint of the framework has an actuator mounted thereto to provide kinesthetic feedback to the hand of the operator. The actuator is configured as a clutch-like member that impedes further motion of the joint as a function of the forces encountered by the remote robotic device. The clutch-like member is driven by a magnetostrictive element, the electromagnetic coil of which receives electrical signals representative of the forces encountered by the remote robotic device.

It is, therefore, a primary object of this invention to provide improvements in kinesthetic feedback to an exoskeletal control system.

Another object of this invention is to provide improvement in the method of providing kinesthetic feedback to an exoskeleton control system.

Another object of this invention is to provide a magnetostrictive driving mechanism for creating a restrictive force against motion of a sensor module on the exoskeletal framework, the degree of restrictive force being a function of the degree of resistive force encountered by the robotic element controlled by the sensor module.

Another object of this invention is to provide a kinesthetic feedback to a sensor module that is proportional to the forces encountered by the robotic element controlled by the sensor module.

These and other objects and features of the present invention will become more readily apparent from the following description in which preferred and other embodiments of the invention have been set forth in conjunction with the accompanying drawing and appended claims.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a perspective view of one embodiment of an exoskeletal control apparatus shown in the environment of a hand;

FIG. 2 is an enlarged, perspective view of one of the sensor modules of FIG. 1;

FIG. 3 is an exploded, perspective view of the sensor module of FIG. 2;

FIG. 4 is a side elevation of a schematic of a robotic hand and a controller; and

FIG. 5 is a side elevation of a backhoe and a controller.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The invention is best understood from the following description with reference to the drawing wherein like parts are designated by like numerals throughout and in conjunction with the appended claims.

General Discussion

Robotic control of a remote device has long been known so that improvements have been made in these systems over the years. The present invention incorporates a novel kinesthetic feedback system into each control module on an exoskeletal framework so as to impart to the operator a tactile sensation that is representative of the forces or, more accurately, the resistance encountered by the remote device being selectively controlled through manipulation of the various control modules on the exoskeletal framework. A key element of each kinesthetic feedback device is a magnetostrictive material such as Terfenol-D. The magnetostrictive material provides the motive force for imposing a frictional force against further movement of a joint. The electrical energy to the magnetostrictive material is provided by a controller as a function of the resistive forces encountered by the robotic device.

Terfenol-D is the name designated for a preferred form of magnetostrictive material. Terfenol-D is an alloy of terbium, dysprosium, and iron. A rod of Terfenol-D experiences a significant degree of elongation under the influence of an electromagnetic field. Systems based on Terfenol-D require relatively low intensity magnetic fields and can be operated with small voltages as compared to piezoceramics. Terfenol-D has the further advantage of having a rapid response

time (5 KHz) unlike shape memory alloys such as Nitinol and without the brittleness of piezoceramics because of its high modulus.

Each control module of this invention is configured with a kinesthetic feedback device which includes a rod of Terfenol-D surrounded by an electromagnetic coil. An optional permanent magnet can be placed at one end of the magnetostrictive rod to bias the magnetostrictive rod. The other end of the rod is placed in abutment against a clutch plate. The purpose of the clutch plate is to impart a frictional resistance against a moving joint of the exoskeletal framework which resistance is, in turn, sensed by the operator of the exoskeletal framework as a resistive force against further motion of that particular joint. The resistive force imposed on the joint is a function of the resistive force encountered upon movement of the remote device. Accordingly, each kinesthetic feedback device is configured to present to the operator a tactile sense to each operative element of the exoskeletal framework as a function of the resistive forces encountered by the corresponding operative element of the remote device.

Detailed Description

Referring now to FIG. 1, the novel exoskeletal control apparatus of this invention with kinesthetic feedback is shown generally as exoskeletal manipulator 10 and includes a plurality of control modules 20a-20e mounted to a glove framework 12 which is fitted to a hand 14. Glove framework 12 is provided with a glove-like configuration into which hand 14 can be inserted so as to enable hand 14 to selectively manipulate control modules 20a-20e as will be discussed more fully hereinafter. Importantly, glove framework 12 engages hand 14 with sufficient snugness to enable hand 14 to both accurately manipulate each of control modules 20a-20e as selectively predetermined by the operator (not shown) as well as suitably sense the kinesthetic feedback imparted to hand 14 through control modules 20a-20e. This is important since the primary function of exoskeletal control 10 is to accurately sense the motion of the respective joints of hand 14 with control modules 20a-20e in order to accurately manipulate a remote device such as an artificial hand 40 (FIG. 2), a backhoe 90 (FIG. 5), or such other device susceptible to being manipulated through signals received from exoskeletal control 10.

Glove framework 12 includes a basal element 15 configured to receive at least the palm portion of hand 14. Finger loops 16a-16e are designed to snugly engage the respective sections of the index finger 11 and thumb 13 of hand 14. Basal element 15 along with finger loops 16a-16e are preferably fabricated from an elasticized material such as Spandex so as to enable basal element 15 and finger loops 16a-16e to accommodate various sizes of hand 14.

Referring now also to FIGS. 2 and 3, a control module identical to each of control modules 20a-20e is shown generally at 20 and also greatly enlarged for ease of illustration. FIG. 3 shows control module 20 in an exploded, perspective view in order to more fully describe its various features. Control module 20 includes a cylindrical housing 22 having an internal cavity 24 with threads 26. A pair of diametrically opposed, longitudinally oriented keyways 28a and 28b are formed in the wall surface of internal cavity 24. The proximal end of housing 22 is closed by an end plug 32 while the distal end of housing 22 is closed by an end cap 34. A cut out portion of the sidewall of housing 22 adjacent end cap 34 forms a side port 30, the function of which will

be discussed more fully hereinafter. End plug 32 includes a slot 31 for engagement of a screwdriver (not shown) therein and threads 33 which threadedly engage corresponding threads 26 in the proximal end of housing 22. Correspondingly, end cap 34 includes threads 35 which threadedly engage corresponding threads 37 in the distal end of housing 22. End cap 34 includes a bearing face 36 which forms an abutment surface interiorly in housing 22. End cap 34 also includes an annular rim 38 which forms one edge of side port 30 when threads 35 of end cap 34 are threadedly engaged to threads 37 of housing 22.

Side port 30 is configured as an arcuate slot in a portion of the sidewall of the distal end of housing 22. A lever arm 40 is operable to move arcuately in a plane orthogonal to the axis of housing 22. Lever arm 40 is mounted to an edge of a lever body 42 having a short, cylindrical profile and adapted to being retained inside housing 22 with lever arm 40 extending outwardly through side port 30. The thickness of lever body 42 is incrementally wider than the width of side port 30 so as to provide secure retention of lever body 42 inside housing 22 when end cap 34 is mounted thereto. Additionally, the diameter of lever arm 40 is incrementally smaller than the width of side port 30 to allow for limited arcuate movement of lever arm 40 arcuately about the axis of control module 20.

A thrust plate 44 includes a pair of outwardly extending keys 45a and 45b which are designed to engage the corresponding keyways 28a and 28b, respectively, in housing 22. Thrust plate 44 is configured to be pressed against lever body 42 with keys 45a and 45b preventing rotational movement of thrust plate 44. A magnetostrictive rod 50 is encircled by an electromagnetic coil 52 and is mounted coaxially in housing 22. Electromagnetic coil 52 includes wires 54 which extend outwardly from housing 22 through a hole 23. End plug 32 encloses magnetostrictive rod 50 inside housing 22 while simultaneously serving to adjustably predetermine the spatial relationship of thrust plate 44 to lever body 42. In particular, elongation of magnetostrictive rod 50 is designed to push thrust plate 44 against lever body 42 and thereby frictionally engage lever body 42 between thrust plate 44 and bearing face 36 of end cap 34.

A lateral tube 62 is mounted to the side of housing 22 and provides a number of useful features to control module 20. Lateral tube 62 is a hollow, cylindrical tube that opens into interior 24 of housing 22 at a position juxtaposed to lever body 42. A position sensor 60 is mounted inside lateral tube 62 where it can sense the position of lever body 42 and, therefore, the position of lever arm 40. A conductor 64 extends outwardly through a hole 63 in lateral tube 62 when position sensor 60 is mounted inside lateral tube 62.

Lateral tube 62 also serves as an anchoring system for securing control module 20 to glove framework 12. Additionally, lateral tube 62 slidably receives the lever arm 40 of the adjacent control module 20 thereby allowing exoskeletal control 10 to compensate for variations in length as control modules 20a-20e are flexed across the respective joints of hand 14 as will be described more fully hereinafter. Lateral tube 62 is configured to be mounted to hand 14 in such a position as to place housing 22 in juxtaposition with the adjacent joint of hand 14 thereby enabling lever body 42 to more closely mimic the relative motion of the respective joint of hand 14.

The flexure of the various joints of hand 14 is sensed by the respective position sensor 60 (FIG. 3) in each of the lateral tubes 62a-62e of the respective control modules 20a-20e. This change in position is created when the

respective lever arm **40a-40e** rotates its lever body (lever body **42**, FIG. 3). This rotation is sensed by position sensor **60**, and the resulting signal is transmitted through the respective sensor lead **64a-64e** to controller **80** (FIGS. 4 and 5) where it is suitably processed and directed to the appropriate actuator on the respective robotic device (robotic hand **70**, FIG. 4) or (backhoe **90**, FIG. 5).

Flexure of hand **14** pivotally rotates the respective lever arm **40a-40e** about their respective axes creating the foregoing signals through signal leads **64a-64e**. Since movement of each joint of hand **14** creates an increase in the spatial separation between the respective control modules **20a-20e**, lateral tubes **62b**, **62c**, and **62e** slidingly engage lever arm **40a**, **40b**, and **40d**, respectively. Finger loops **16c** and **16e** include slide tubes **17a** and **17b**, respectively, which slidingly receive lever arms **40c** and **40e**, respectively, to engage the same to finger **11** and thumb **13**, respectively. Lateral tubes **62a** and **62d** do not have lever arms slidingly engaged therein since control modules **20a** and **20d** are not joined to another control module on that side.

Referring now to FIG. 4, robotic hand **70** is shown as a highly stylized, schematic robotic hand **70** having a finger **78** and a thumb **79** extending from a hand section **71**. Finger **78** includes a first finger segment **72** while thumb **79** includes a first thumb segment **75** each of which are pivotally mounted hand section **71**. Additional finger segments, second finger segment **73** and third finger segment **74**, are pivotally mounted end-to-end, respectively, to first finger segment **72**. Correspondingly, a second thumb segment **76** is pivotally mounted to the end of first thumb segment **75**. Pivots **77a-77e**, respectively, pivotally mount each of finger segments **72-74** and thumb segments **75** and **76** to hand section **71** and to the adjacent finger or thumb segment.

All of pivots **77a-77e** operate in a single plane so that the arcuate movement of first finger segment **72** is coplanar with the plane of hand section **71**. Correspondingly, all of finger segments **72-74** and thumb segments **75** and **76** are configured to be operated essentially coplanar with hand section **71**. This feature enables robotic hand **70** to grasp an item (not shown) between the various elements of finger **78** and thumb **79**.

Clearly, of course, robotic hand **70** is shown highly stylized for ease of illustration and discussion. Accordingly, the basic functional features illustrated thereon are for illustrative purposes only with the understanding that the actual operational devices may have a different appearance although the functioning will be essentially as described herein.

A plurality of actuators **80a-80e** are mounted to robotic hand **70** across pivots **77a-77e**, respectively, so as to provide the necessary motive force for pivotal movement of the respective elements at that particular pivot. For example, actuation of actuator **80a** pivotally moves first finger segment **72** about pivot **77a** and relative to hand section **71**. Actuators **80a-80e** are identical having identical operating features and can be hydraulic pistons, solenoids, or any other suitable device for producing a linear actuating force in both the forward and reverse directions. Actuators **80a-80e** operate between two raised pivots **81a-81e** and **83a-83e**, respectively. A pressure sensor is incorporated into each of raised pivots **83a-83e** with the signal therefrom being transmitted to a controller **100** through sensor leads **84a-84e**, respectively.

Controller **100** also includes control leads **82a-82e** which transmit the respective control signals to each of actuators **80a-80e** to cause them to individually elongate or retract as

a function of the respective control signal from control modules **20a-20e** (FIG. 1) respectively. For example, a control signal transmitted through control lead **82a** instructing actuator **80a** to elongate results in an elongation of actuator **80a** with corresponding pivotal movement of first finger segment **72** about pivot **77a**. Resistive forces encountered by first finger segment **72** are sensed by the sensor in raised pivot **83a** and the resistive signal generated thereby is transmitted through signal lead **84a** to controller **100**. Controller **100** relays a signal corresponding to the resistive signal through lead **54a** (FIG. 1) to electromagnetic coil **52** (FIG. 3) where a corresponding resistive force is generated thereby as discussed herein before. The operative control signals through control leads **82a-82e** are received by controller **100** through control leads **64a-64e**, respectively, from control modules **20a-20e**, respectively.

Referring now to both FIG. 4 and FIG. 1, each movement of finger **11** and thumb **13** is sensed by control modules **20a-20e** with the movement thereof being transmitted through leads **64a-64e** to controller **100**. Controller **100** transmits corresponding signals to actuators **80a-80e**, respectively, so that the individual movements of control modules **20a-20e** are replicated by actuators **80a-80e**. Advantageously, resistive forces encountered upon movement of actuators **80a-80e** are sensed by the sensors at raised pivots **83a-83e** with the signals generated thereby being directed by controller **100** back to control modules **20a-20e**, respectively, where these signals are used to generate resistive forces against further movement of lever arms **40a-40e** of control modules **20a-20e**. These resistive forces are tactilely sensed by finger **11** and thumb **13** to thereby provide the user of exoskeletal manipulator **10** with the appropriate kinesthetic feedback.

Referring now to FIG. 5, a conventional backhoe is shown generally at **90** and includes a support beam **92** pivotally mounted at its proximal end to a frame **91** at a beam pivot **95a**. An arm **93** is pivotally mounted to the distal end of support beam **92** at an arm pivot **95b** while a bucket **94** is pivotally mounted to an end of arm **93** at a bucket pivot **95c**. A plurality of hydraulic pistons **96a-96d** selectively manipulate each of support beam **92**, arm **93**, and bucket **94** to achieve the desired operation of backhoe **90**. For example, hydraulic piston **96a** is pivotally interconnected between frame **91** and support beam **92** at pivot supports **97a** and **97b**, respectively. Hydraulic piston **96a** pivotally moves support beam **92** laterally about beam pivot **95a** to swing bucket **94** arcuately to the left and right, the direction depending upon whether hydraulic piston **96a** is extended or retracted.

Support beam **92** is raised and lowered by the selective control of hydraulic piston **96b**. Hydraulic piston **96b** is pivotally interconnected between frame **91** and support beam **92** by pivot supports **97c** and **97d**, respectively. Support beam **92** is pivotally connected to frame **91** for up and down pivotal movement by a corresponding pivot (not shown) behind beam pivot **95a** so that extension of hydraulic piston **96b** lowers support beam **92** and retraction of hydraulic piston **96b** raises support beam **92**.

Arm **93** is moved arcuately about arm pivot **95b** by the selective extension and retraction of a hydraulic piston **96c** which is pivotally interconnected between support beam **92** and the end of arm **93** by pivot supports **97e** and **97f**, respectively. Extension of hydraulic piston **96c** moves arm **93** arcuately downward toward frame **91** while retraction of hydraulic piston **96c** extends arm **93** into a position that is generally coextensive with support beam **92**.

Correspondingly, bucket **94** is moved arcuately about bucket pivot **95c** upon extension and retraction of hydraulic

piston **96d** which is pivotally interconnected between arm **93** and bucket **94** by pivot supports **97g** and **97h**, respectively. Extension of hydraulic piston **96d** moves bucket **94** in a digging motion toward support beam **92** while retraction of hydraulic piston **96d** moves bucket **94** into an inverted orientation for dumping the contents therefrom.

Extension of hydraulic pistons **96a-96d** is accomplished by directing hydraulic pressure through each of extension hydraulic lines **102a-102d**, respectively. Retraction of hydraulic pistons **96a-96d** is accomplished by directing hydraulic pressure through each of retraction hydraulic lines **104a-104d**, respectively. Clearly, of course, the hydraulic pressure in each of hydraulic pistons **96a-96d** is suitably balanced at all times between extension hydraulic lines **102a-102d** and retraction hydraulic lines **104a-104d** in order to maintain the structural configuration of all of support beam **92**, arm **93**, and bucket **94** with respect to frame **91**. Selective movement of any of these structural elements is accomplished through the use of a controller **110** which selectively directs the appropriate increases and decreases in the hydraulic pressure in the preselected extension hydraulic lines **102a-102d** and retraction hydraulic lines **104a-104d** so as to achieve the desired movement of any of these structural elements.

Resistive forces encountered by each of support beam **92**, arm **93**, and especially bucket **94** are sensed by controller **110** as a function of changes in the pressure differentials between the respective pairs of extension hydraulic lines **102a-102d** and retraction hydraulic lines **104a-104d**. The signals represented by these resistive forces are processed by controller **110** and transmitted back to exoskeletal manipulator **10** (FIG. 1) via feedback lines **54a-54e** to provide the novel kinesthetic feedback system of this invention. Correspondingly, control signals are initiated by movement of control modules **20a-20e** on exoskeletal manipulator **10** which control signals are transmitted via control lines **64a-64e** to controller **110** where they are translated into the appropriate hydraulic pressures for each of extension hydraulic lines **102a-102d** and retraction hydraulic lines **104a-104d** to thereby enable robotic hand **10** to suitably control backhoe **90** and to receive kinesthetic feedback therefrom through control modules **20a-20e**.

The Method

The method of this invention involves the selection of an exoskeletal framework such as a glove framework **14** and affixing at least one control module **20** thereto. Control module **20** is mounted over the predetermined joint in either finger **11** or thumb **13** so as to enable control module **20** to sense relative movement of the particular joint to which it is affixed. Movement of the joint moves lever arm **40** in an arcuate path causing lever body **42** to rotate inside housing **22**. This rotary motion of lever body **42** is sensed by position sensor **60** which transmits a control signal to either controller **100** or controller **110**. This control signal is processed in controller **100** or controller **110** and then relayed through control lines **82a-82e** or control lines **102a-102e**, respectively, to control the movement of the respective robotic device, robotic hand **70** or backhoe **90**.

Importantly resistive forces encountered by either robotic hand **70** or backhoe **90** are sensed by sensors **83a-83e** or the sensor system of controller **110**, respectively, with the corresponding resistive signals being transmitted through wires **54a-54e** to the respective electromagnetic coil **52** in each of control modules **20a-20e**. The resistive signal energizes

electromagnetic coil **52** causing magnetostrictive rod **50** to elongate. Elongation of magnetostrictive rod **50** pushes against thrust plate **44** to constrict the rotational motion of lever body **42** and, therefore, the arcuate movement of lever arm **40**. Restriction of the arcuate movement of lever arm **40** is sensed tactilely by the corresponding appendages of hand **14** thereby providing the novel kinesthetic feedback system of this invention. The degree to which lever body **42** is restricted in its rotational movement is a direct function of the resistive signal received by electromagnetic coil **52**.

The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed and desired to be secured by United States Letters Patent is:

1. A control apparatus having kinesthetic feedback comprising:

first sensor means for sensing relative movement of a human appendage, said first sensor means producing a first signal as a function of said relative movement, said first sensor means comprising a lever pivotally mounted at a pivot to the human appendage so that movement of the human appendage causes a corresponding movement of said lever, said first sensor means further including a sensor on said pivot for sensing rotation of said pivot, said sensor producing said first signal;

mounting means for mounting said first lever to the human appendage;

an actuator located a distance from said first sensor means;

first processor means for processing said first signal and transmitting said first signal to said actuator, said first processor means driving said actuator as a function of said relative movement of the human appendage;

resistive means mounted to said mounting means for imparting a kinesthetic feedback to the human appendage, said resistive means comprising a clutch means on said pivot, said clutch means comprising a clutch actuator for resisting movement of said lever;

second sensor means for sensing a resistive force encountered by said actuator upon movement of said actuator, said second sensor means producing a second signal;

second processor means for transmitting said second signal to said resistive means, said second signal means causing said resistive means to impart said kinesthetic feedback to the human appendage, said kinesthetic feedback being a function of said resistive force; and

a magnetostrictive rod driven by said second signal, said magnetostrictive rod being coupled to said clutch means to operate said clutch actuator as a function of said second signal.

2. The control apparatus defined in claim 1 wherein said control apparatus includes a plurality of first sensor means, each of said plurality of first sensor means being mounted to a separate portion of the human appendage by said mounting means so that each of said plurality of first sensor means is driven independently by the human appendage.

3. The control apparatus defined in claim 2 wherein said control apparatus includes a plurality of said actuators and corresponding resistive means, each of said plurality of

9

actuators including a second sensor means for generating a plurality of second signals, said plurality of said second signals connected to said second processor means for transmitting said second signals to said corresponding plurality of said resistive means for creating a plurality of kinesthetic feedback to the human appendage. 5

4. A control apparatus operable by a human appendage and including kinesthetic feedback to the human appendage comprising:

a position sensor mounted to the human appendage for sensing motion of the human appendage, said position sensor producing a first signal as a function of said motion, said position sensor comprising a lever pivotally mounted on a pivot to the human appendage so that movement of the human appendage creates a corresponding movement of said lever, said position sensor including a movement sensor on said pivot for sensing said movement of said lever, said pivot including a clutch actuator on said pivot, said clutch actuator comprising said kinesthetic feedback by creating rotational resistance against said pivot, said rotational resistance being sensed by the human appendage as said kinesthetic sensation, said pivot comprising a housing having a disc pivotally mounted therein with said lever extending outwardly from said disc, said clutch including a pressure plate and a magnetostrictive rod in abutment with said pressure plate, said magnetostrictive rod pushing said pressure plate against said disc to impede rotational movement of said disc, said magnetostrictive rod being surrounded by an electromagnetic coil, said electromagnetic coil receiving said second signal to cause elongation of said magnetostrictive rod, said elongation being a function of said second signal;

an actuator at a remote location from said position sensor, said actuator being driven in response to said first signal;

a resistance sensor for sensing resistive forces encountered by said actuator as said actuator is being driven in response to said first signal, said resistance sensor producing a second signal as a function of said resistive forces; and

a kinesthetic feedback on said position sensor said kinesthetic feedback being operable by said second signal to impart a kinesthetic sensation to the human appendage as a function of said second signal. 45

5. The control apparatus defined in claim 4 wherein said housing includes said position sensor mounted in abutment to said disc, said position sensor sensing the rotational movement of said disc to produce said first signal as a function of said rotational movement. 50

6. A method for receiving a tactile sensation through a manipulation apparatus, the tactile sensation being representative of a resistive force encountered by a remote

10

actuator controlled by the manipulation apparatus comprising the steps of:

preparing a position sensor for sensing changes in the relative position of a lever arm mounted to a joint of a human appendage, said position sensor sending position signals as a function of changes in said relative position;

mounting said position sensor to the human appendage; moving the appendage thereby causing said position sensor to send position signals;

controlling movement of said remote actuator with said position signals from said position sensor;

sensing resistive forces encountered by said remote actuator during said movement;

producing a resistance signal as a function of said sensing resistive forces;

placing a magnetostrictive rod adjacent said lever arm, said magnetostrictive rod being surrounded by an electromagnetic coil;

transmitting said resistance signals to said coil; and

extending said magnetostrictive rod with said resistance signals causing a retarding movement of said lever arm by the human appendage thereby providing a tactile sensation to the human appendage as a function of said resistive forces.

7. The method defined in claim 6 wherein said preparing step further includes preparing a plurality of said position sensors and said mounting step comprises mounting each of said position sensors to different joints of the human appendage, the human appendage being a human hand and the joints being on fingers of the hand.

8. The method defined in claim 7 wherein said mounting step comprises preparing a glove-like assembly and attaching each of said position sensors to preselected locations on said glove-like assembly thereby placing each of said position sensors over preselected joints of the hand.

9. The method defined in claim 6 wherein said extending step comprises resisting movement of said lever joint of said position sensor by applying a braking action on said lever joint.

10. The method defined in claim 9 wherein said placing step comprises obtaining said magnetostrictive rod and placing said magnetostrictive rod in contact with said lever arm and surrounding said magnetostrictive rod with said electromagnetic coil, said transmitting step including directing said resistance signals to said electromagnetic coil thereby causing said magnetostrictive rod to create said braking action on said lever arm, the human appendage sensing said braking action as a function of said resistive forces encountered by said remote actuator.

* * * * *